






## On request UPS 40-80 FN 250 50 Hz

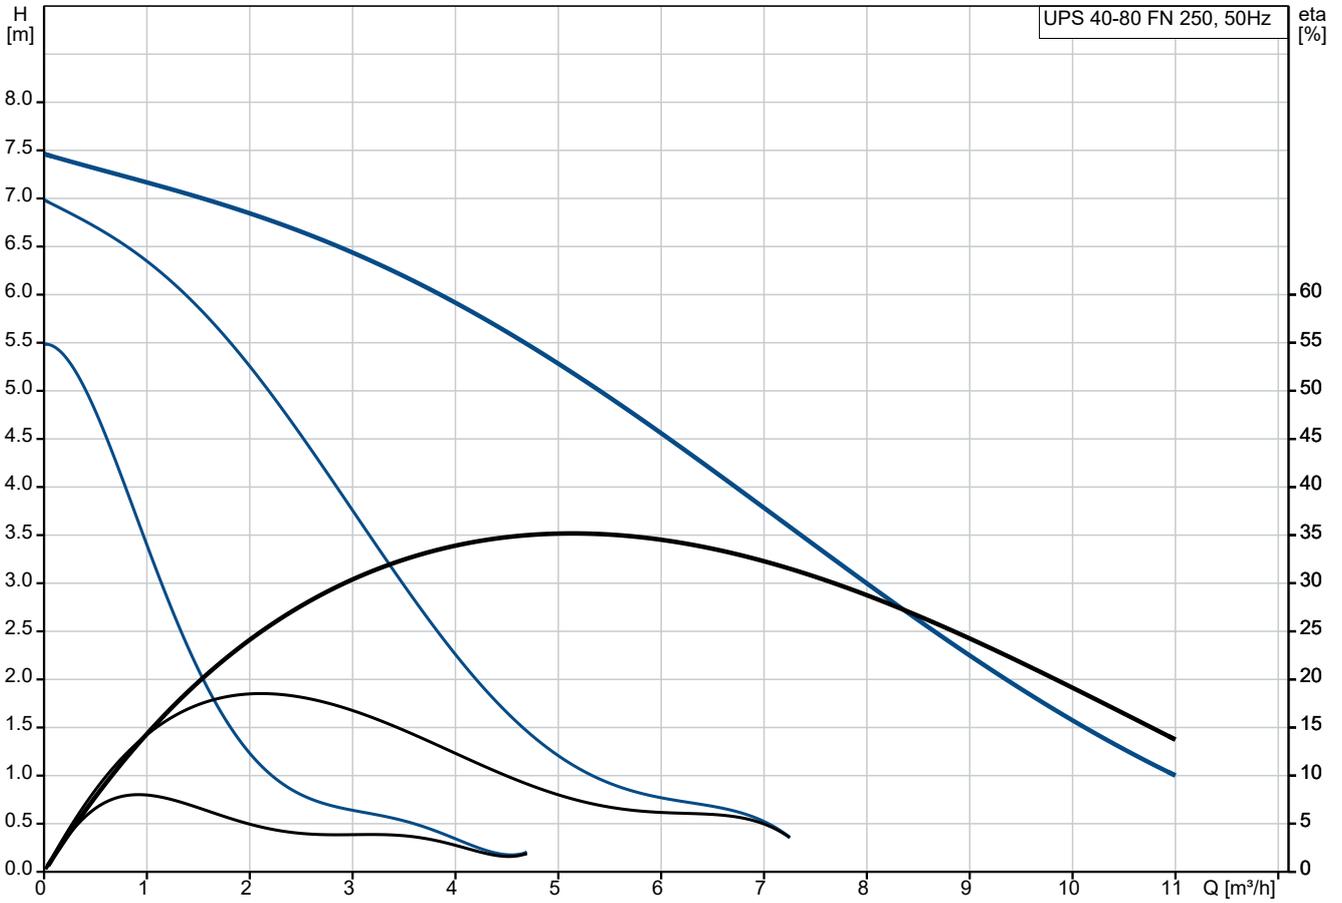




Pumped liquid = Water  
 Liquid temperature during operation = 60 °C  
 Density = 983.2 kg/m³

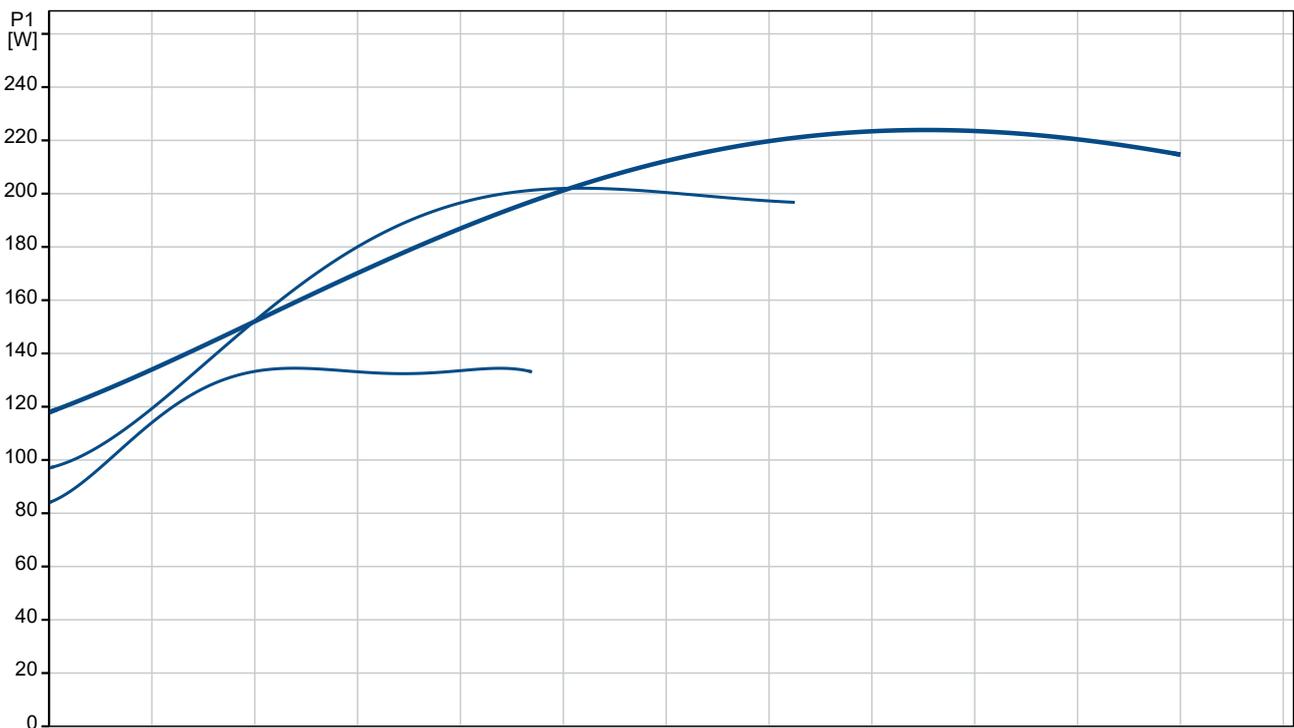

Description	Value
<b>General information:</b>	
Product name:	UPS 40-80 FN 250
Product No:	On request
EAN number:	On request
Price:	GBP 1566
<b>Technical:</b>	
Speed no:	3
Rated flow:	5.13 m <sup>3</sup> /h
Rated head:	5.19 m
Maximum head:	80 dm
TF class:	110
Approvals:	CE,WEEE,UKCA
<b>Materials:</b>	
Pump housing:	Stainless steel
Pump housing:	EN 1.4308
Impeller:	Composite
Impeller:	PES+30% GF
<b>Installation:</b>	
Range of ambient temperature:	0 .. 40 °C
Amb. max at 80 dgr C liquid:	40 °C
Maximum operating pressure:	10 bar
Type of connection:	DIN
Size of connection:	DN 40
Pressure rating for connection:	PN 10
Port-to-port length:	250 mm
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input in speed 1:	135 W
Power input in speed 2:	200 W
Max. power input:	220 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	0.6 A
Current in speed 2:	0.9 A
Current in speed 3:	0.98 A
Capacitor size - run:	4 µF
Enclosure class (IEC 34-5):	X2D
Insulation class (IEC 85):	F
Built-in motor protection:	CONTACT
Thermal protec:	internal
<b>Others:</b>	
Terminal box position:	9H
Net weight:	8.18 kg
Gross weight:	8.5 kg
Shipping volume:	0.011 m <sup>3</sup>
Country of origin:	RS
Custom tariff no.:	84137030

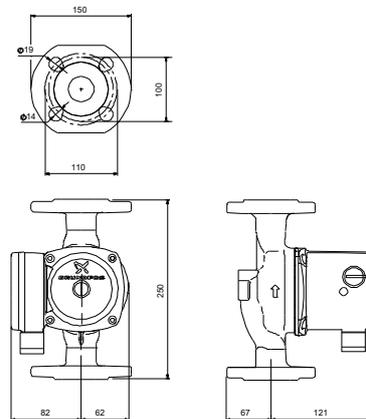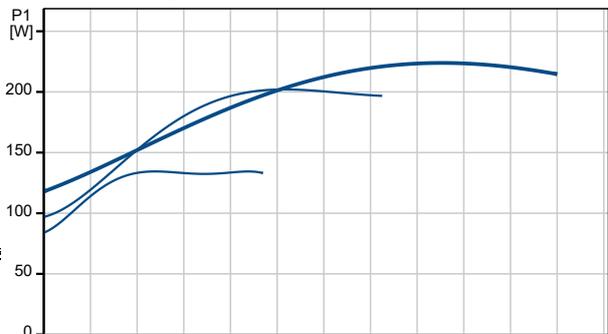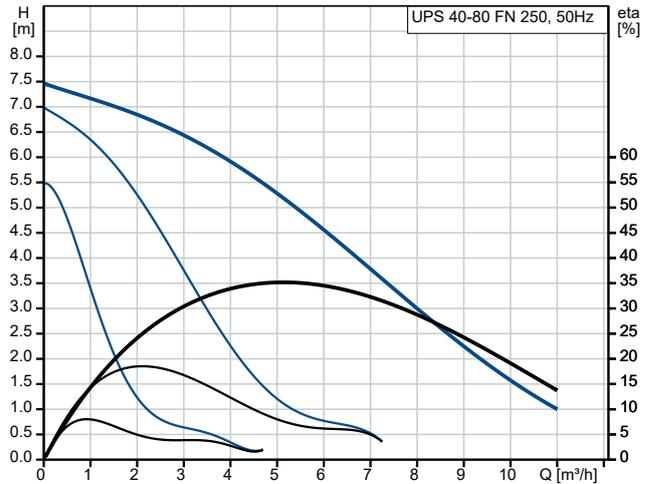


## On request UPS 40-80 FN 250 50 Hz

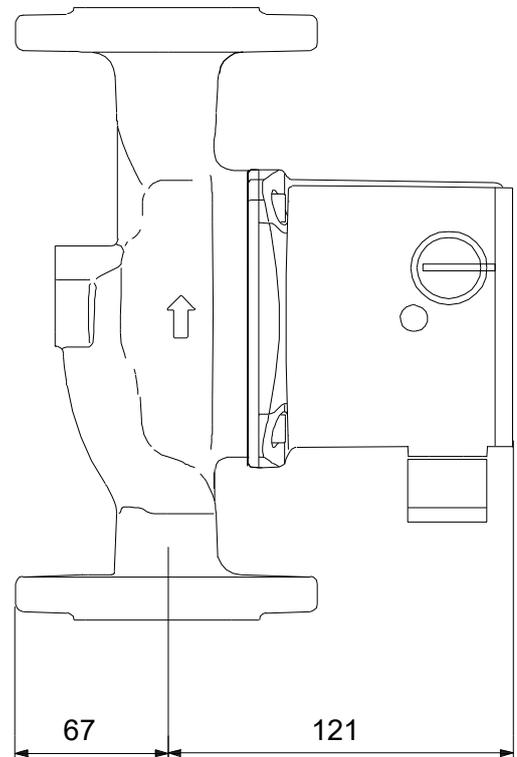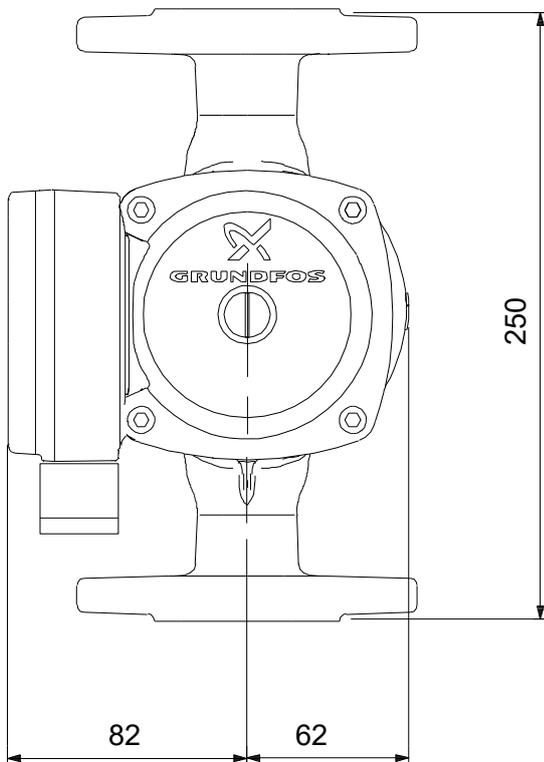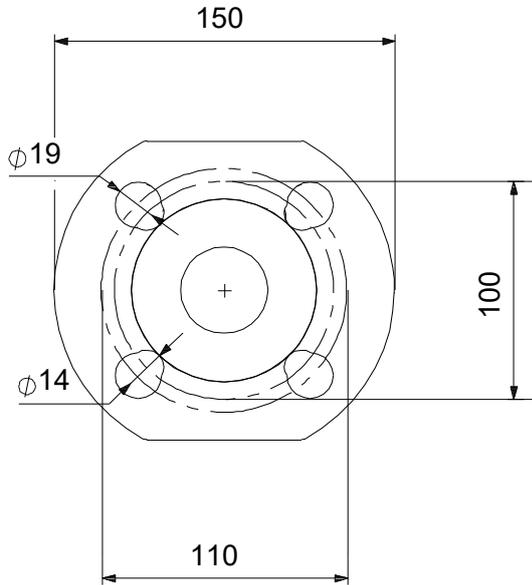

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

**On request UPS 40-80 FN 250 50 Hz**

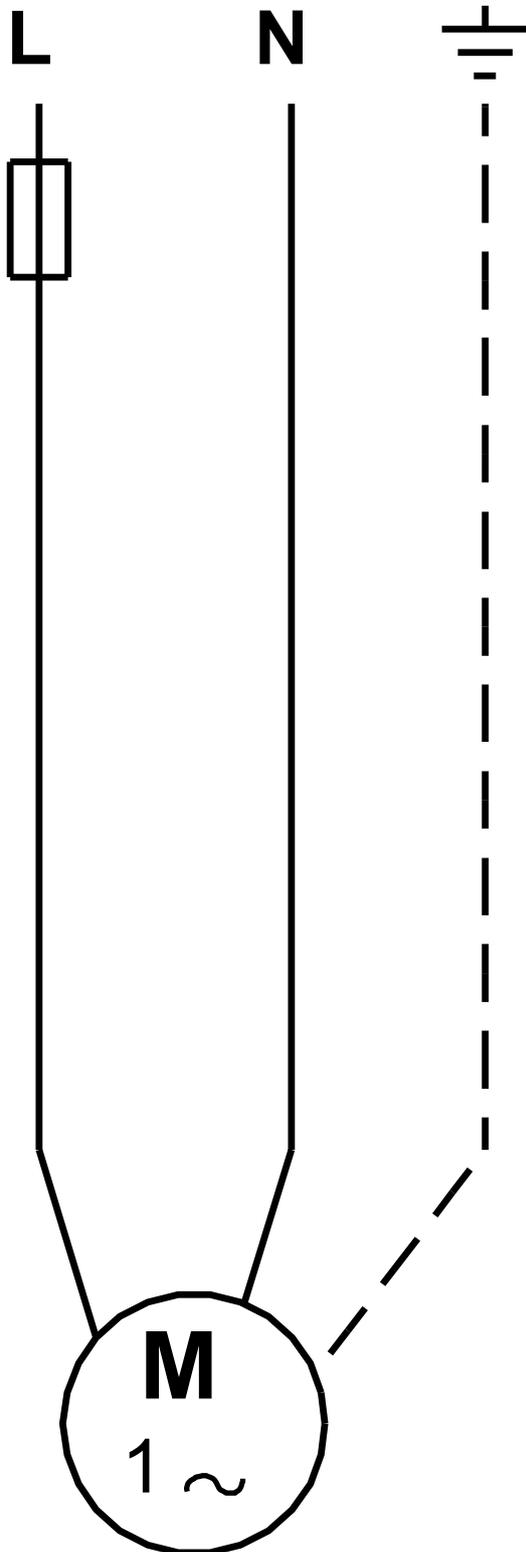

Note! All units are in [mm] unless others are stated.

