

**Qty. Description**

1 TP 40-360/2 A-F-A-BQQE-KW1



Note! Product picture may differ from actual product

 Product No.: [96086925](#)

Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework.

The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

The pump is fitted with a fan-cooled asynchronous motor.

**Controls:**

Frequency converter: None

**Liquid:**

Pumped liquid: Water

Liquid temperature range: -25 .. 120 °C

Selected liquid temperature: 20 °C

 Density: 998.2 kg/m<sup>3</sup>
**Technical:**

Pump speed on which pump data are based: 2920 rpm

 Rated flow: 26.6 m<sup>3</sup>/h

Rated head: 29.3 m

Actual impeller diameter: 163 mm

Code for shaft seal: BQQE

Curve tolerance: ISO9906:2012 3B2

**Materials:**

 Pump housing: Cast iron  
 EN-GJL-250  
 ASTM class 35

 Impeller: Cast iron  
 EN-GJL-200  
 ASTM class 30

**Installation:**

Range of ambient temperature: -30 .. 60 °C

Maximum operating pressure: 16 bar

Max pressure at stated temp: 16 bar / 120 °C

Type of connection: DIN

Size of connection: DN 40

Pressure rating for connection: PN 16

Port-to-port length: 340 mm

Flange size for motor: FF215

**Electrical data:**

Motor type: 112MC



Company name:

Created by:

Phone:


Date:

29/12/2023

**Qty. Description**

1	Rated power - P2:	4 kW
	Mains frequency:	50 Hz
	Rated voltage:	3 x 380-415D V
	Rated current:	7.9 A
	Starting current:	1000-1110 %
	Cos phi - power factor:	0.87-0.87
	Rated speed:	2920-2940 rpm
	IE Efficiency class:	IE3
	Motor efficiency at full load:	88.1-88.1 %
	Motor efficiency at 3/4 load:	88.6-88.2 %
	Motor efficiency at 1/2 load:	85.2-88.1 %
	Number of poles:	2
	Enclosure class (IEC 34-5):	55 Dust/Jetting
	Insulation class (IEC 85):	F
	Motor No:	87322303
	Others:	
	Minimum efficiency index, MEI $\geq$ :	0.52
	Net weight:	70.8 kg
	Gross weight:	82 kg
	Shipping volume:	0.217 m <sup>3</sup>
	Danish VVS No.:	381702360
	Finnish LVI No.:	4616040
	Country of origin:	HU
	Custom tariff no.:	84137051

**96086925 TP 40-360/2 A-F-A-BQQE-KW1 50 Hz**

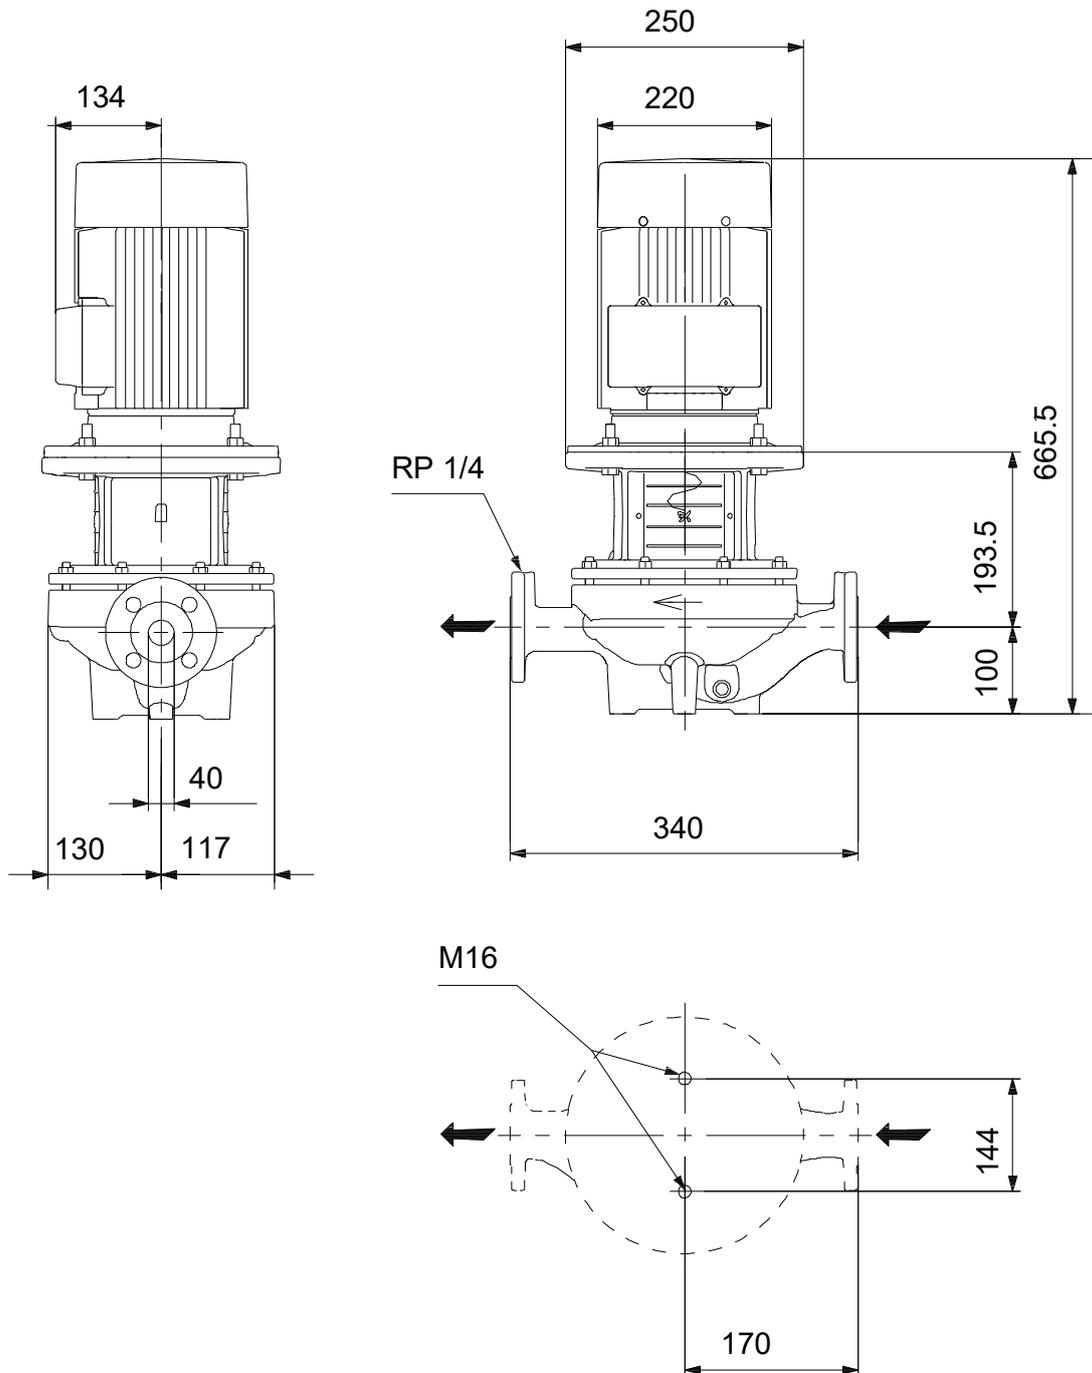

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.