

Qty. Description

1 TP 100-370/4 A-F-A-BQQE-PW3



Note! Product picture may differ from actual product

Product No.: [96109310](#)

Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework.

The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

The pump is fitted with a fan-cooled asynchronous motor.

Controls:

Frequency converter: None

Liquid:

Pumped liquid: Water

Liquid temperature range: -25 .. 120 °C

Selected liquid temperature: 20 °C

Density: 998.2 kg/m³

Technical:

Pump speed on which pump data are based: 1465 rpm

Rated flow: 164 m³/h

Rated head: 29.3 m

Actual impeller diameter: 320 mm

Code for shaft seal: BQQE

Curve tolerance: ISO9906:2012 3B

Materials:

Pump housing: Cast iron
EN-GJL-250
ASTM class 35

Impeller: Cast iron
EN-GJL-200
ASTM class 30

Installation:

Range of ambient temperature: -20 .. 55 °C

Maximum operating pressure: 16 bar

Max pressure at stated temp: 16 bar / 120 °C

Type of connection: DIN

Size of connection: DN 100

Pressure rating for connection: PN 16

Port-to-port length: 670 mm

Flange size for motor: FF300


Electrical data:

Motor type: SIEMENS


Qty. Description

1	<p>Rated power - P2: 18.5 kW</p> <p>Mains frequency: 50 Hz</p> <p>Rated voltage: 3 x 380-420D/660-725Y V</p> <p>Rated current: 35/20.5 A</p> <p>Starting current: 720-720 %</p> <p>Cos phi - power factor: 0.82</p> <p>Rated speed: 1470 rpm</p> <p>IE efficiency: IE3 92,6%</p> <p>IE Efficiency class: IE3</p> <p>Motor efficiency at full load: 92.6-92.6 %</p> <p>Motor efficiency at 3/4 load: 93.1-93.1 %</p> <p>Motor efficiency at 1/2 load: 92.9-92.9 %</p> <p>Number of poles: 4</p> <p>Enclosure class (IEC 34-5): IP55</p> <p>Insulation class (IEC 85): F</p> <p>Motor No: 99032117</p> <p>Others:</p> <p>Minimum efficiency index, MEI \geq: 0.69</p> <p>Net weight: 327 kg</p> <p>Gross weight: 387 kg</p> <p>Shipping volume: 0.937 m³</p> <p>Danish VVS No.: 381716370</p> <p>Finnish LVI No.: 4616128</p> <p>Country of origin: HU</p> <p>Custom tariff no.: 84139100</p>
---	---


96109310 TP 100-370/4 A-F-A-BQQE-PW3 50 Hz

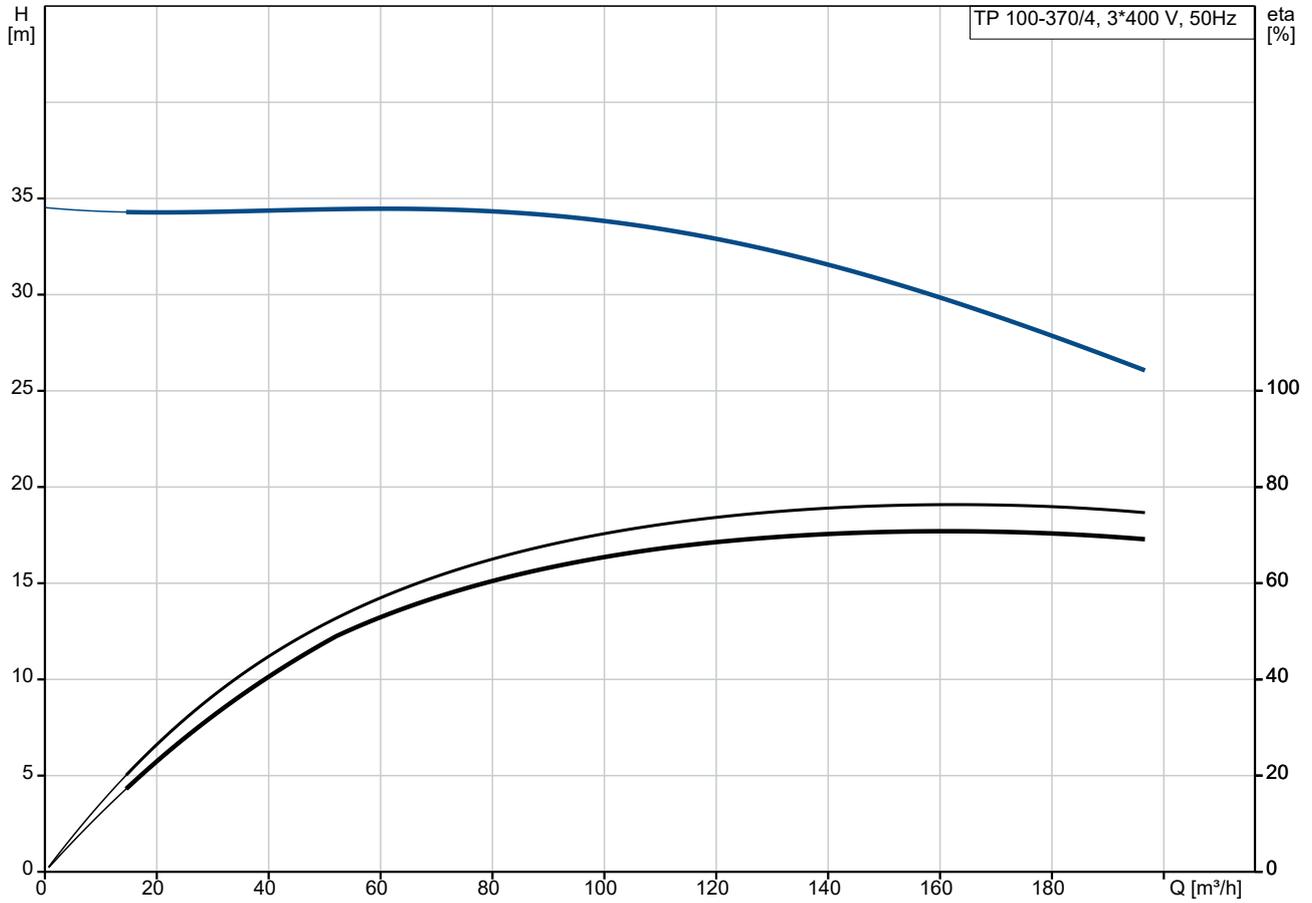

Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

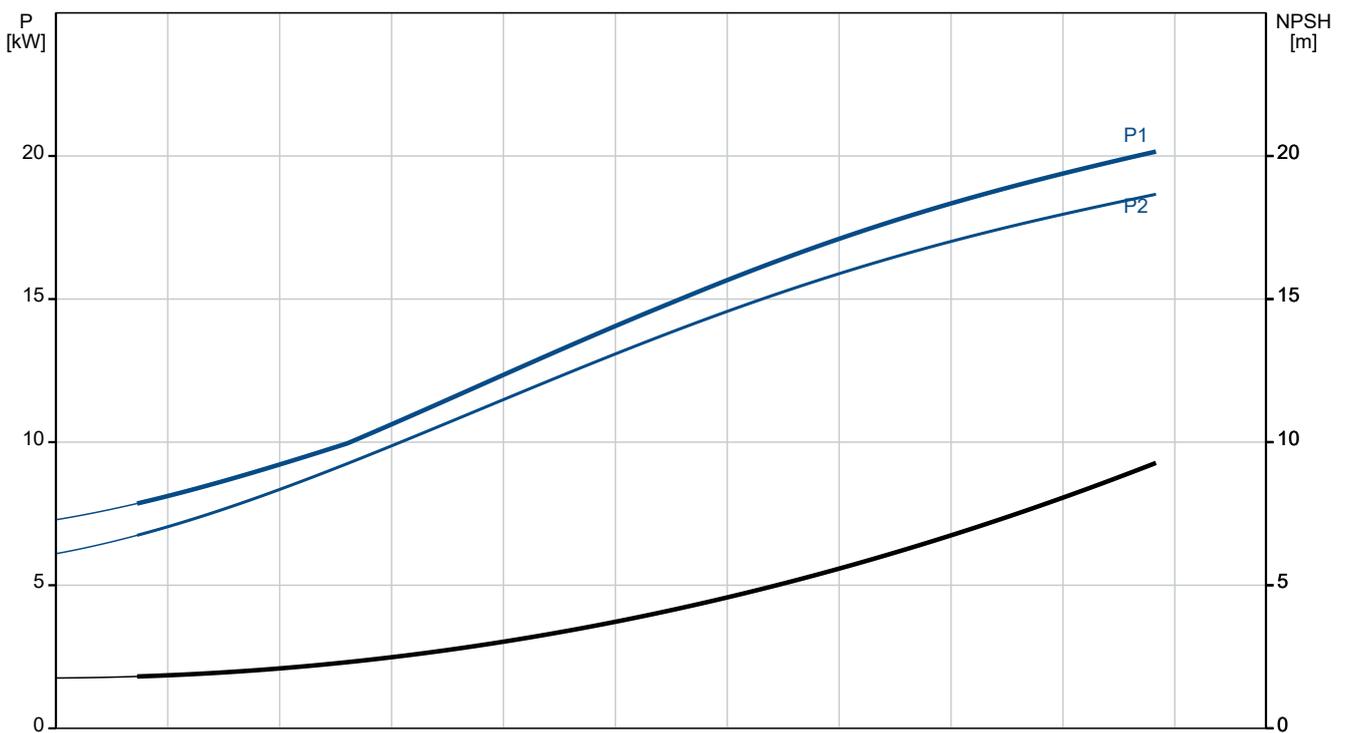

96109310 TP 100-370/4 A-F-A-BQQE-PW3 50 Hz

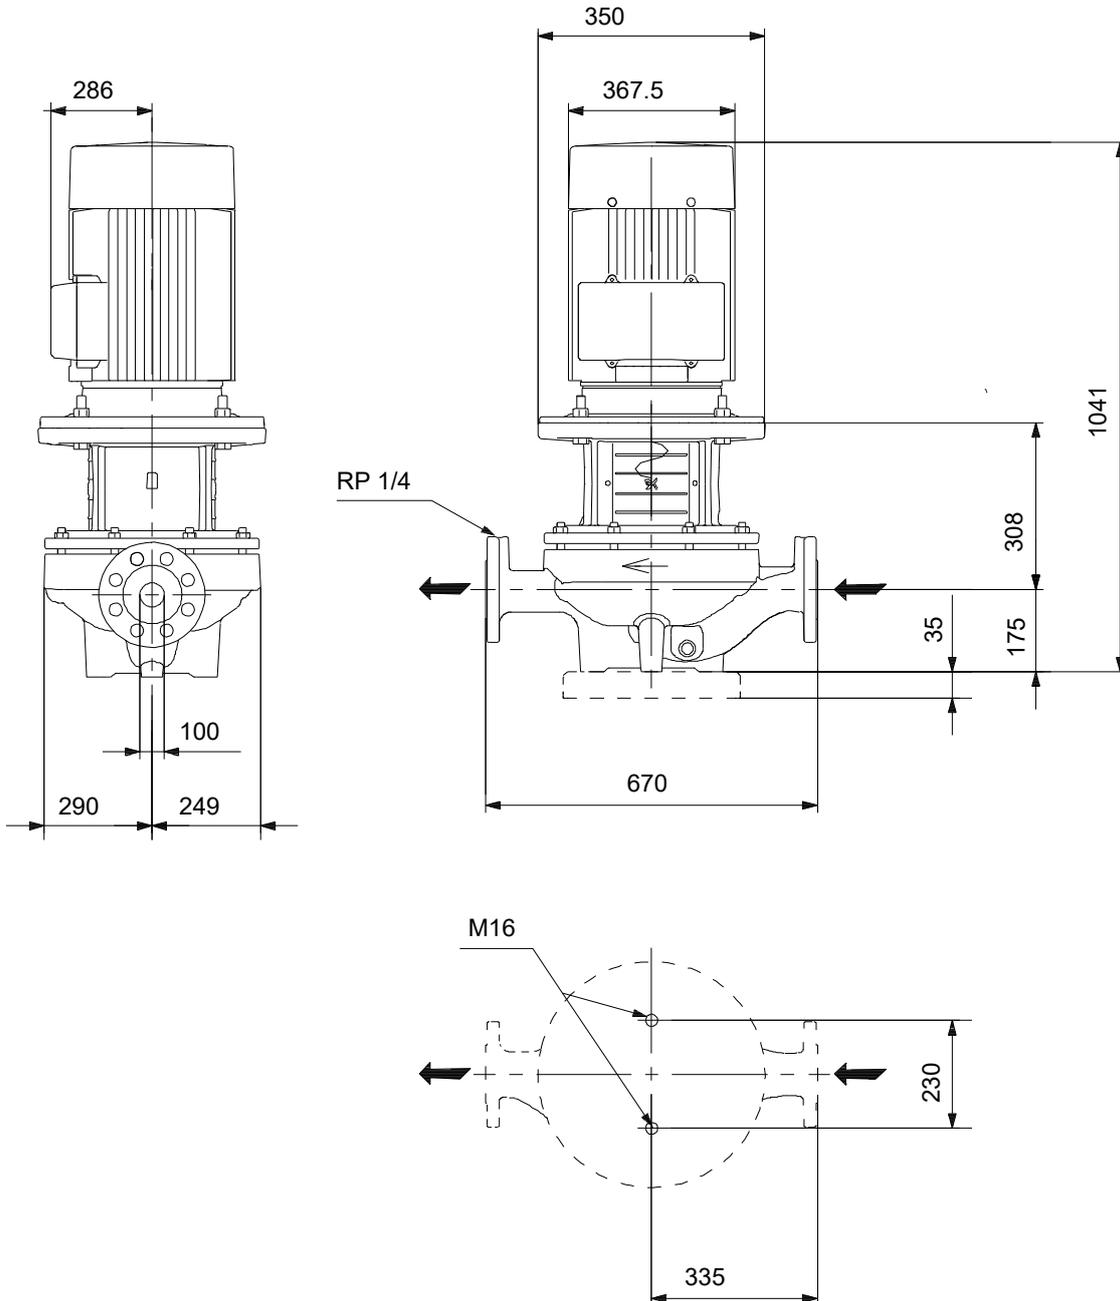

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.