

Qty. Description

1 TP 125-230/4 A-F-A-BQQE-OW3



Note! Product picture may differ from actual product

Product No.: [98743685](#)

Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework.

The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

The pump is fitted with a fan-cooled asynchronous motor.

Controls:

Frequency converter: None

Liquid:

Pumped liquid: Water  
 Liquid temperature range: -25 .. 120 °C  
 Selected liquid temperature: 20 °C  
 Density: 998.2 kg/m<sup>3</sup>

Technical:

Pump speed on which pump data are based: 1470 rpm  
 Rated flow: 0 m<sup>3</sup>/h  
 Rated head: 0 m  
 Actual impeller diameter: 269 mm  
 Code for shaft seal: BQQE  
 Curve tolerance: ISO9906:2012 3B

Materials:

Pump housing: Cast iron  
 EN-GJL-250  
 ASTM class 35  
 Impeller: Cast iron  
 EN-GJL-200  
 ASTM class 30

Installation:

Range of ambient temperature: -20 .. 55 °C  
 Maximum operating pressure: 16 bar  
 Max pressure at stated temp: 16 bar / 120 °C  
 Type of connection: DIN  
 Size of connection: DN 125  
 Pressure rating for connection: PN 16  
 Port-to-port length: 800 mm  
 Flange size for motor: FF300


Electrical data:

Motor type: SIEMENS


Qty.	Description
------	-------------

1	Rated power - P2: 15 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-420D/660-725Y V Rated current: 28.5/16.6 A Starting current: 850-850 % Cos phi - power factor: 0.82 Rated speed: 1475 rpm IE efficiency: IE3 92,1% IE Efficiency class: IE3 Motor efficiency at full load: 92.1-92.1 % Motor efficiency at 3/4 load: 92.3-92.3 % Motor efficiency at 1/2 load: 91.5-91.5 % Number of poles: 4 Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Motor No: 99032114  Others: Minimum efficiency index, MEI $\geq$ : 0.70 Net weight: 278 kg Gross weight: 339 kg Shipping volume: 0.937 m <sup>3</sup> Danish VVS No.: 381717230 Finnish LVI No.: 4616143 Country of origin: HU Custom tariff no.: 84139100
---	---


**98743685 TP 125-230/4 A-F-A-BQQE-OW3 50 Hz**

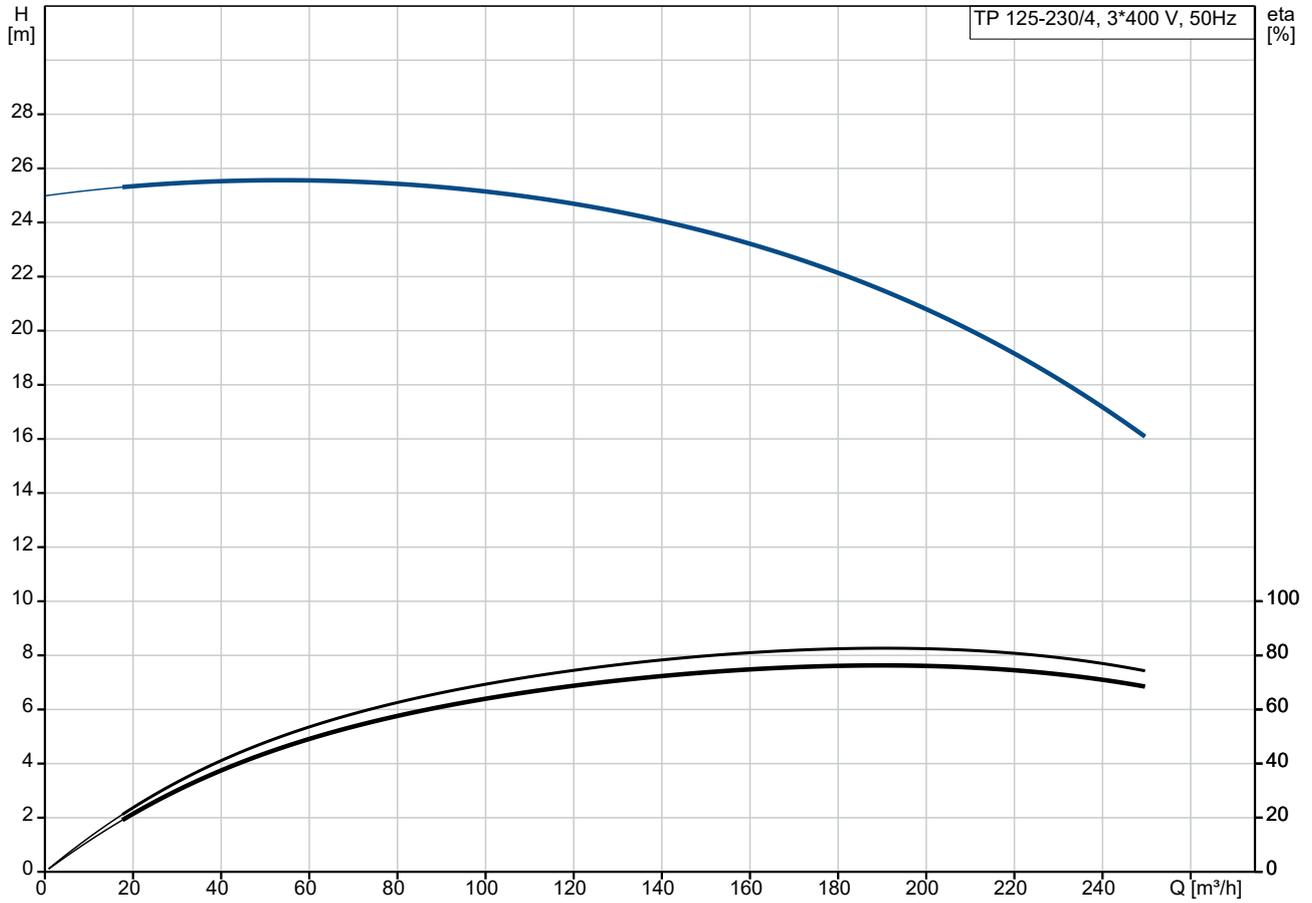

Pumped liquid = Water  
Liquid temperature during operation = 20 °C  
Density = 998.2 kg/m³

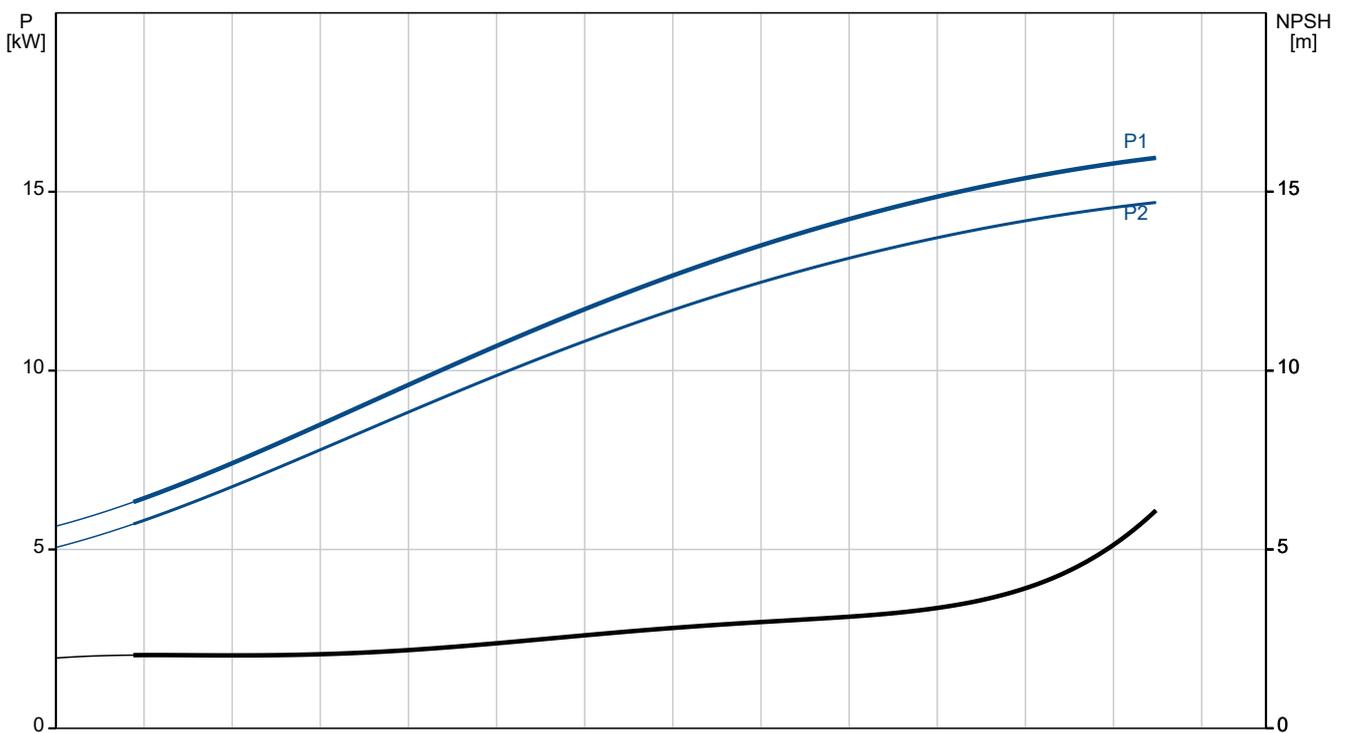

**98743685 TP 125-230/4 A-F-A-BQQE-OW3 50 Hz**

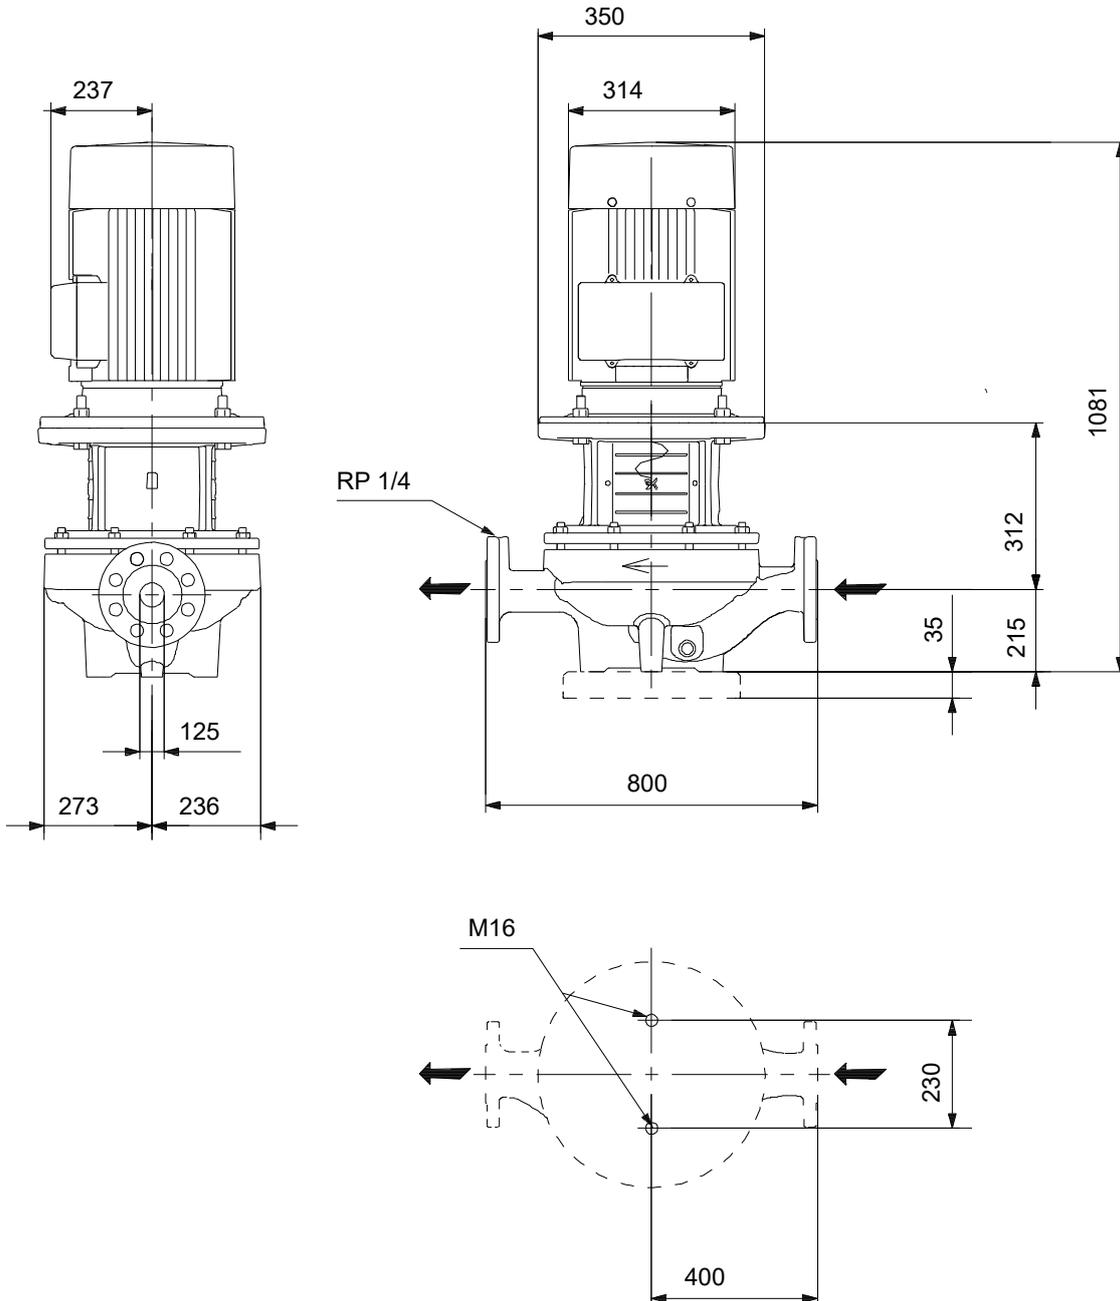

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.