

**Qty. Description**

1 **DPI/--0-2.5b/1/ G/D.900-B/V-5/-B/02B/SD-1**

Product No.: On request

The transmitter is made of 1.4404 stainless steel.

Liquid:

Liquid temperature range: -10 .. 70 °C

Technical:

Approvals: EAC

Pressure differential functionality = Yes/No: Y

Pressure relative functionality (Yes/No): N

Flow functionality (Yes/No): N

Temperature functionality (Yes/No): N

Minimum measuring pressure: 0 bar

Maximum measuring pressure: 2.5 bar

Installation:

Range of ambient temperature: -40 .. 70 °C

Electrical data:

Enclosure class (IEC 34-5): IP55

Length of cable: 0.9 m

Minimum rated voltage dc: 12.00 V

Maximum rated voltage dc: 30.00 V

Others:

Danish VVS No.: 475273025


Swedish RSK No.: 6010204

Finnish LVI No.: 4534505


Country of origin: DK

Custom tariff no.: 90262020

Description	Value
<b>General information:</b>	
Product name:	DPI--0-2.5b/1/ G/D.900-B/V-5/-B/02B/SD-1
Product No:	On request
EAN number:	On request
Price:	GBP 938
<b>Technical:</b>	
Approvals:	EAC
Pressure differential functionality = Yes/No:	Y
Pressure relative functionality (Yes/No):	N
Flow functionality (Yes/No):	N
Temperature functionality (Yes/No):	N
Minimum measuring pressure:	0 bar
Maximum measuring pressure:	2.5 bar
<b>Installation:</b>	
Range of ambient temperature:	-40 .. 70 °C
<b>Liquid:</b>	
Liquid temperature range:	-10 .. 70 °C
<b>Electrical data:</b>	
Enclosure class (IEC 34-5):	IP55
Length of cable:	0.9 m
Minimum rated voltage dc:	12.00 V
Maximum rated voltage dc:	30.00 V
<b>Others:</b>	
Danish VVS No.:	475273025
Swedish RSK No.:	6010204
Finnish LVI No.:	4534505
Country of origin:	DK
Custom tariff no.:	90262020

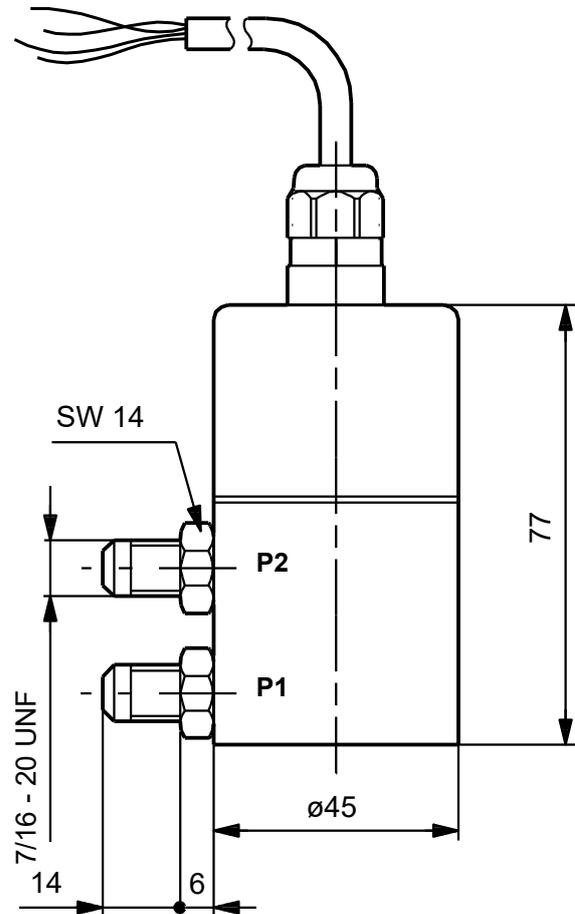

On request DPI/--0-2.5b/1/ G/D.900-B/V-5/-B/02B/SD-1

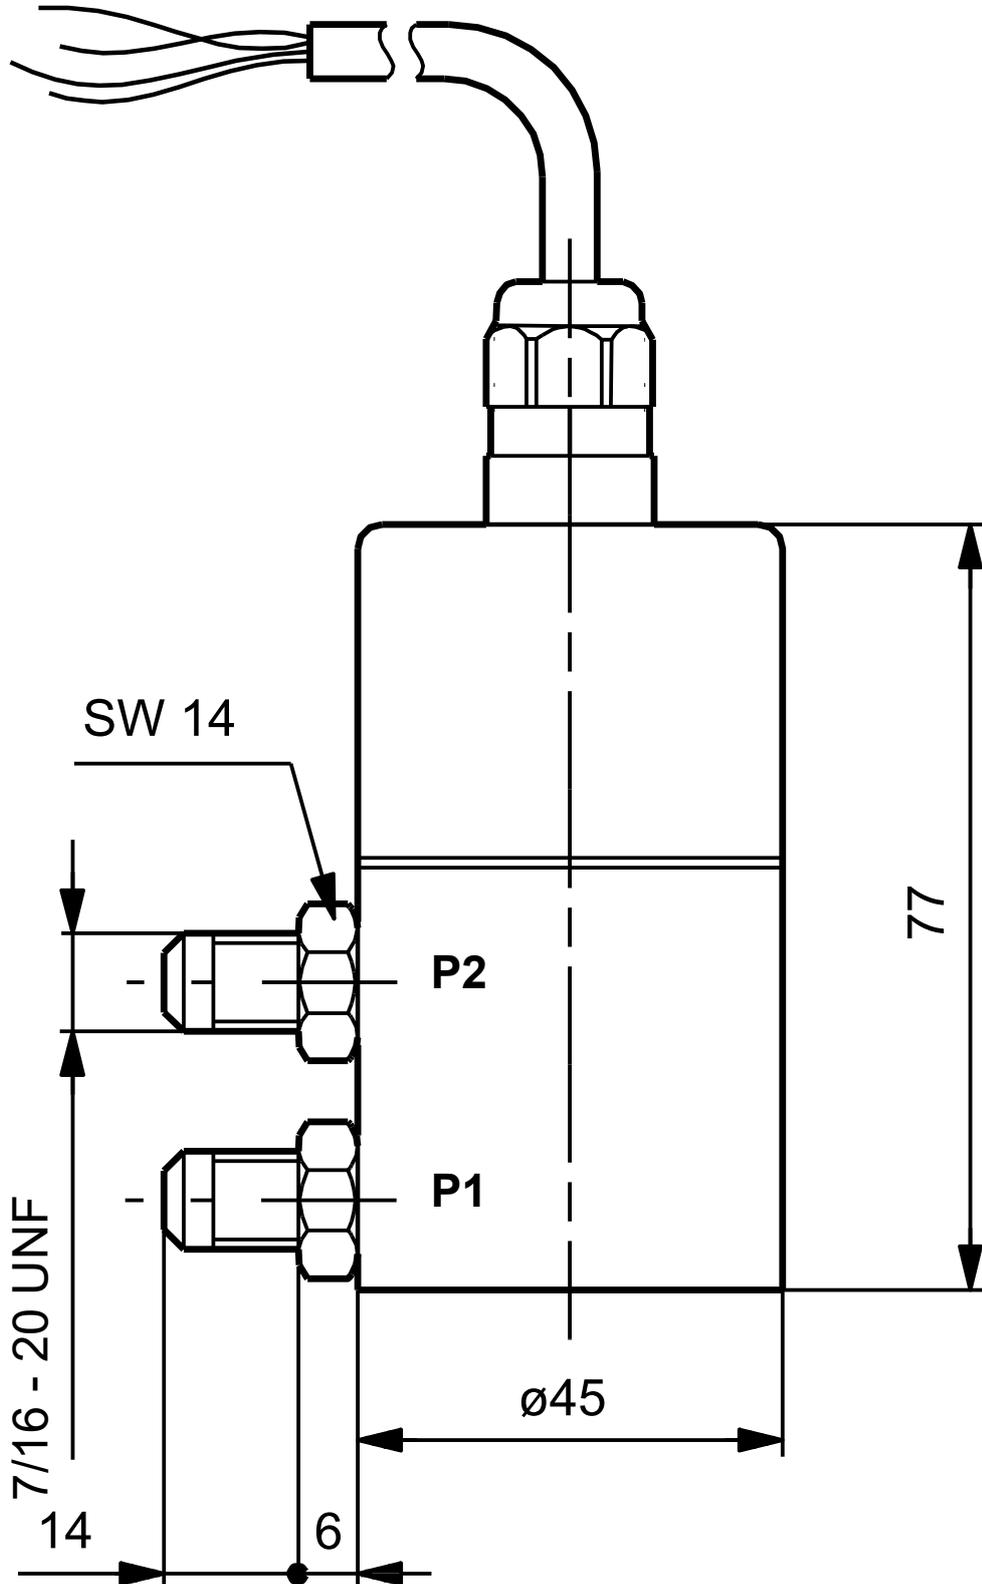

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.