

**Qty. Description**

1 TP 32-60/2 A-F-A-BQQE-CW1



Note! Product picture may differ from actual product

Product No.: [98946132](#)

Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework.

The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Pipework connection is via PN 6/10 DIN flanges (EN 1092-2 and ISO 7005-2).

The pump is fitted with a fan-cooled asynchronous motor.

**Controls:**

Frequency converter: None

**Liquid:**

Pumped liquid: Water

Liquid temperature range: -25 .. 120 °C

Selected liquid temperature: 20 °C

Density: 998.2 kg/m³

**Technical:**

Pump speed on which pump data are based: 2890 rpm

Rated flow: 7.5 m³/h

Rated head: 3.6 m

Actual impeller diameter: 64 mm

Code for shaft seal: BQQE

Curve tolerance: ISO9906:2012 3B2

**Materials:**

Pump housing: Cast iron  
EN-GJL-250  
ASTM class 35

Impeller: Stainless steel  
EN 1.4301  
AISI 304

**Installation:**

Range of ambient temperature: -20 .. 40 °C

Maximum operating pressure: 10 bar

Max pressure at stated temp: 10 bar / 120 °C

Type of connection: DIN

Size of connection: DN 32

Pressure rating for connection: PN 6/10

Port-to-port length: 220 mm

Flange size for motor: FT75


**Electrical data:**

Motor type: SIEMENS

**Qty. Description**

1	Rated power - P2:	0.25 kW
	Mains frequency:	50 Hz
	Rated voltage:	3 x 220-240/380-415 V
	Rated current:	1,2-1,2/0,69-0,69 A
	Starting current:	410-410 %
	Cos phi - power factor:	0.81
	Rated speed:	2835 rpm
	IE efficiency:	IE2 64,8%
	IE Efficiency class:	IE2
	Motor efficiency at full load:	64.8-64.8 %
	Motor efficiency at 3/4 load:	63.5-63.5 %
	Motor efficiency at 1/2 load:	57.3-57.3 %
	Number of poles:	2
	Enclosure class (IEC 34-5):	IP55
	Insulation class (IEC 85):	F
	Motor No:	99995095
	Others:	
	Minimum efficiency index, MEI ≥:	0.56
	Net weight:	16.8 kg
	Gross weight:	20.3 kg
	Shipping volume:	0.08 m <sup>3</sup>
	Danish VVS No.:	381811060
	Finnish LVI No.:	4616009
	Norwegian NRF no.:	9043528
	Country of origin:	HU
	Custom tariff no.:	84137051

## 98946132 TP 32-60/2 A-F-A-BQQE-CW1 50 Hz

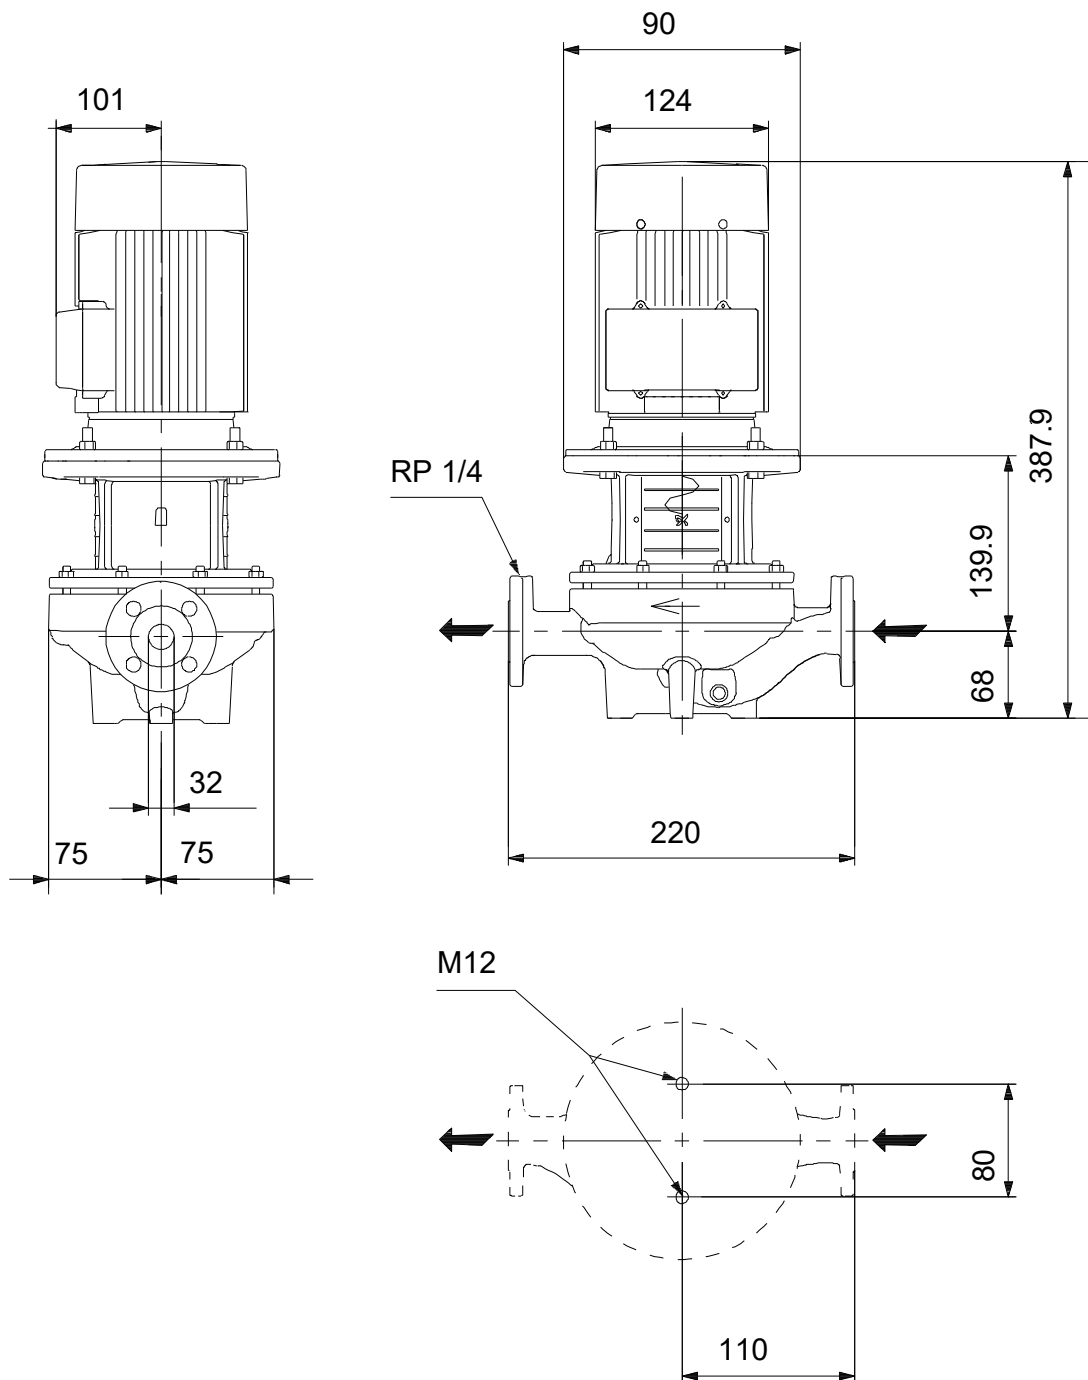

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.